

474 Series 240 Volt Dual Heat Fan Forced Portable Heater

80




- 2000W & 4000W heat settings
- Temperature control thermostat
- Manual reset type limit control
- 6' long - 3 conductor cord
- Imported to TPI Corporation specifications

Width: 16"
Height: 16"
Depth: 8-1/2"



UPC#	MODEL	WATTS	MAX BTU's	VOLTS	AMPS	PHASE	WT. (LBS)
446181	H474TM-C	2000 / 4000	13652	240	8.3 / 16.6	1	20

5800 Series Garage/Workshop 240/208 Volt Fan Forced Portable Heater

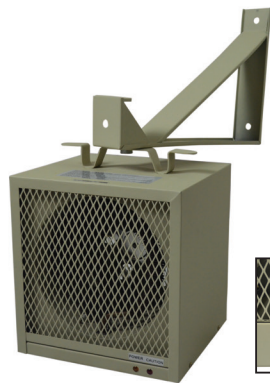

- Up to 4800 Watts of heating comfort for garage or utility room applications
- 4000 Watts available for smaller areas.
- Built in bi-metal double pole thermostat - 50° to 90° range.
- Steel tubular heating element
- Wall/Ceiling bracket included
- Manual reset standard
- Power on and overheat pilot lights

- Imported to TPI Corporation specifications

ITEM	WIDTH	HEIGHT	DEPTH
Heater	10.625	11"	9.625"
Bracket	2.5"	10"	14.0"

UPC#	MODEL	WATTS	MAX BTU's	VOLTS	AMPS	PHASE	PLUG TYPE	WT. (LBS)
503402	HF5840TC	4000/3000	13652	240 / 208	16.6 / 14.4	1	20 Amp	17
503396	HF5848TC	4800/3600	15086		20 / 17.3		30 Amp	

ICH Series 240/208 Volt Construction Site/Utility Fan Forced Portable Heater

- Operates on 240V or 208V
- Steel tubular heating element
- 43°F air heat rise
- Internal overheat thermostat
- Temperature control thermostat
- 6' long cordset

- Imported to TPI Corporation specifications



Width: 10 5/8"
Height: 12 3/4"
Depth: 10"



UPC#	MODEL	WATTS	MAX BTU's	VOLTS	AMPS	PHASE	WT. (LBS)
450874	ICH-240C	4000 / 3000	13648	240 / 208	16.7 / 14.4	1	15

680 Series "Bulldog" 240/208 Volt Fan Forced Portable Unit Heater

Swivel base allows unit to be wall, floor, or ceiling mounted.



- Operates on 240V or 208V
- Finned steel tubular heating element
- Internal manual reset thermal cut-out
- 6' long cord with molded plug
- Temperature control thermostat with 35°F to 85°F range
- 10' air throw - 262 CFM
- Imported to TPI Corporation specifications



Width: 13 1/2"
Height: 17 1/2"
Depth: 11 1/2"

UPC#	MODEL	WATTS	MAX BTU's	VOLTS	PHASE	AMPS	TEMP RISE	WT. (LBS)
446280	*HF684TC	4000/3000	13652/10239	240/208	1	16.7/14.5	48°F	20
446297	HF685TC	4800/3600	16384/12288	240/208	1	20.0/17.4	58°F	20
446303	HF686TC	5600/4200	19107/14330	240/208	1	23.4/20.2	75°F	20
683500	A1560	OPTIONAL WALL CEILING BRACKET FOR HF680 & ICH 240C SERIES HEATERS						

* HF684TC UL listed only