



Submittal Data Sheet  
 1.5-Ton Wall mounted Indoor Unit  
 FTXS18WVJU9

Model			FTXS18WVJU9	
			Cooling	Heating
Power Supply		Phase	1φ	
		Hz, V	60 Hz, 208 - 230 V	
Rated Capacity			18 kBtu/h Class	
Front Panel Color			White	
Airflow Rates	H	cfm (m <sup>3</sup> /min)	583 (16.5)	625 (17.7)
	M		484 (13.7)	526 (14.9)
	L		385 (10.9)	431 (12.2)
	SL		360 (10.2)	399 (11.3)
Fan	Type		Cross Flow Fan	
	Motor Output	HP	0.06	
	Speed	Steps	5 Steps, Quiet, Auto	
Air Direction Control			Right, Left, Horizontal, Downward	
Air Filter			Removable, Washable	
Running Current (Rated)		A	0.32 - 0.30	0.32 - 0.30
Power Consumption (Rated)		W	38 - 38	38 - 38
Power Factor (Rated)		%	57.1 - 55.1	57.1 - 55.1
Temperature Control			Microcomputer Control	
Dimensions (H × W × D)		in. (mm)	13-3/8 × 41-5/16 × 9-3/4 (340 × 1,050 × 248)	
Packaged Dimensions (H × W × D)		in. (mm)	13 × 45-11/16 × 16-7/8 (331 × 1,160 × 429)	
Weight (Mass)		lbs (kg)	31 (14)	
Gross Weight (Gross Mass)		lbs (kg)	43 (19)	
Sound Pressure Level	H / M / L / SL	dB(A)	46 / 41 / 36 / 33	45 / 40 / 35 / 32
Sound Power Level		dB	62	61
Heat Insulation			Both Liquid and Gas Pipes	
Piping Connection	Liquid	in. (mm)	φ 1/4 (φ 6.4)	
	Gas	in. (mm)	φ 1/2 (φ 12.7)	
	Drain	in. (mm)	φ 5/8 (φ 16)	
Note			SL: The quiet fan level of the airflow rate setting	



Daikin Comfort Technologies North America, Inc 19001 Kermier Rd Waller TX 77484  
 Daikin City Generated Submittal Data [www.daikincomfort.com](http://www.daikincomfort.com) or [www.daikinac.com](http://www.daikinac.com)

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications, and information in this data sheet without notice and without incurring any obligations)

# 4. Dimensions



## 4.1 Indoor unit

### CTXS07WVJU9, FTXS09/12WVJU9

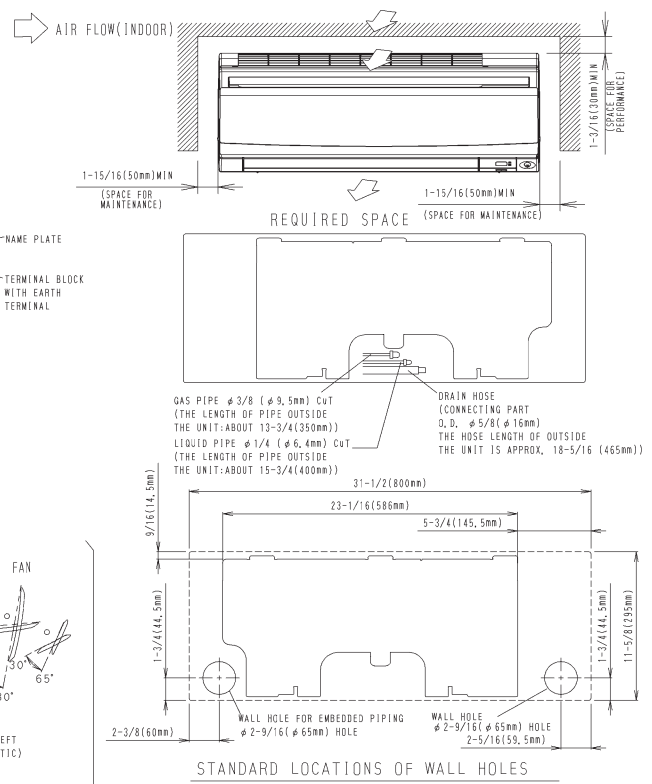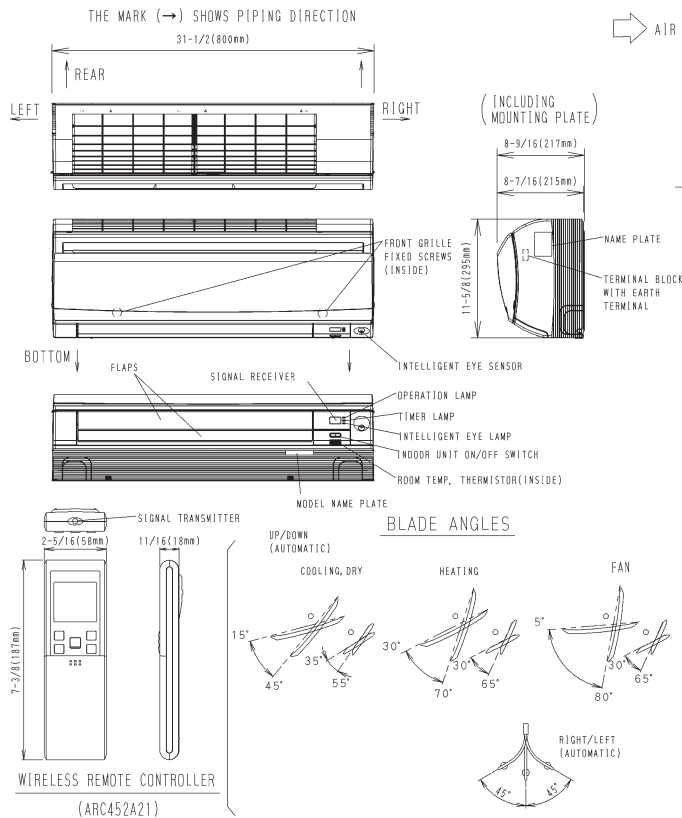

3D074094B

### FTXS15/18WVJU9

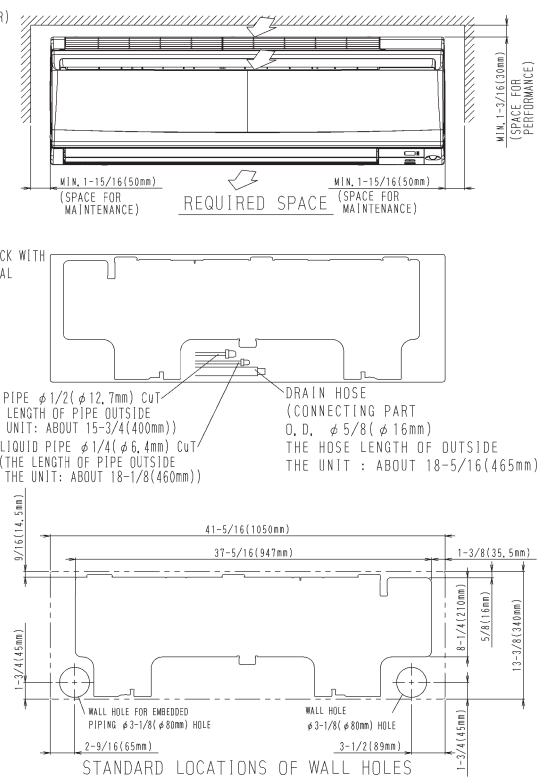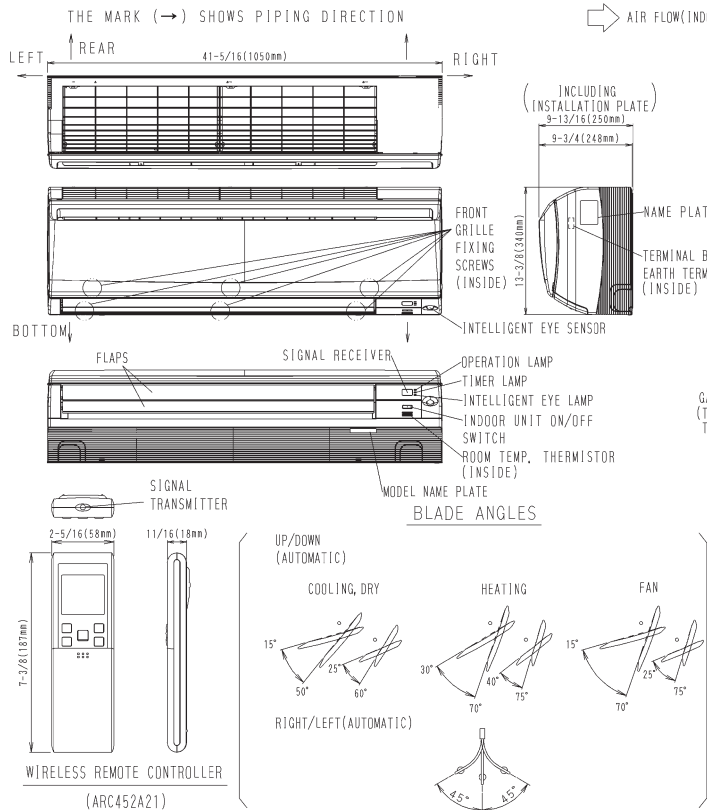

3D074024B