


			Multi-Room	Ductless systems
Submittal Data: SC-18	CD-HP230	18,000 BTU/H Ceilir	ng Cassette	
Job Name		Location	Date	
Purchaser		Engineer		
Submitted To		For Refere	nce 🗌 Approval	☐ Construction
Unit Designation		Schedule No.		
GENERAL FEATURES				
-Quiet Operation -Multi-Speed Fan				
-Medium Static Pressure Capability		- 1		3
-Slim Line Construction 8" high -Internal Condensate Drain Pump				
-Return Air From Rear Only				
-Wired Controllers				46
-Wireless Remote Controllers				
-Sentry Condensate Overflow Protection	on			
Custom Do	Air an	11mia	or Connection O	***
System Ra Cooling*	lungs	Onit	s Specification & Da	ild
Rated Capacity	15,300 BTU/H			
. ,		Wired Controller		XK-19
Heating*				
Rated Capacity	18,700 BTU/H			
Sound Level (Hi/Lo)**		Condensate Drain Lift (I	Heiaht)	18-in
Cooling	41/33 dbA	Condensate Drain Ent (	<u>g</u> ,	457-mm
Heating	41/33 dbA			
		Drain Size (OD)		1.0-in
Air Flow (min/max)				26-mm
Indoor Fan	294/412 CFM			
Ext Static Pressure (max/min)	0.040/0.032 inch wg			
	0.0.0002			
Electrical R	Ratings	Re	frigerant Piping Dat	a
Fan Motor		Refrigerant Type		R410A
Output Power	100 W	31		
FLA	0.43 A	Gas Pipe Size (OD)		1/2-in
Power Supply	200/220 V 1 Dhana / 0 U-	Liquid Pipe Size (OD)		1/4-in
Normal Operational Voltage Voltage Range	208/230 V, 1 Phase, 60 Hz 187 - 253 V	Connection Method		Flared
MCA	187 - 253 V 1.0 A	Connection Method		riaieu
Interconnecting Cable Wire Size	1.0 A 14-4 AWG			
, 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1.		* Test conditions are based	l on AHRI 210/240.	
			er AHRI 270 and AHRI 350	)
R410A	AUDI	DERTIFIED™		(II)
		ww.ahridirectory.org		עוע

## 18,000 BTUH MODEL

Model # SC-18CD-HP230 18,000 BTUH 230V

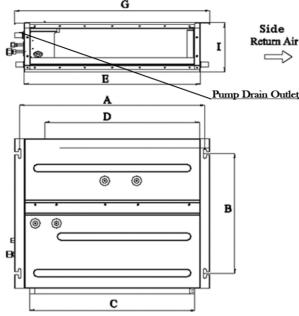

# Liquid Pipe Gas Pipe н Drain Pipe F

#### Notes:

Side

- 1. Size refrigerant lines based on evaporator port sizes.
- 2. Refrigerant and Drain pipe configurations vary by unit size.

### **Dimensions**


	Α	В	С	D	Е	F	G	Н	ı	J
(mm)	942	491	862	820	900	615	982	156	200	635
(inches)	37.1	19.3	33.9	32.3	35.4	24.2	38.7	6.1	7.9	25.0

Weight (Net/Gross)

60/79 lbs

## **INDOOR FAN PEFORMANCE DATA**

WG = inches of water guage

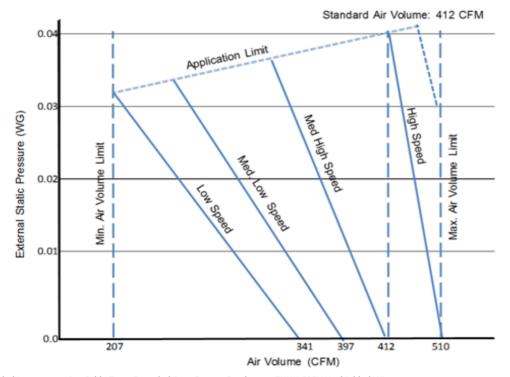

- 1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
- 2. Power wiring cable size must comply with applicable national and local codes.
- 3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.